


DC Voltage: 90 KV

One Conductor


Installation: Weld

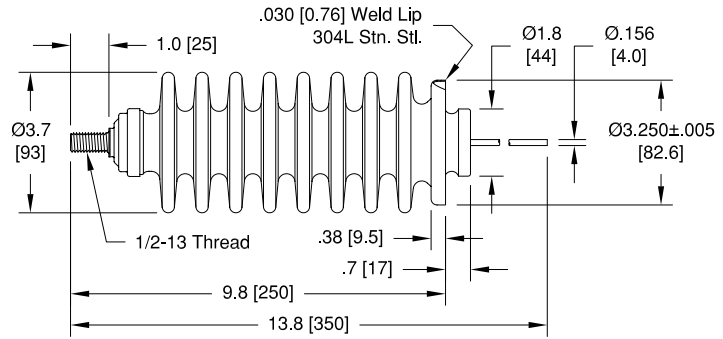

| Amps | Conductor Material | Pressure @ 20°C | | Temperature °C | | Magnetic Materials | Ceramaseal Part Number | List Price |
|------|--------------------|-----------------|-----|----------------|-----|--------------------|------------------------|------------|
| | | PSIG | Bar | Min | Max | | | |

| | | | | | | | | |
|-----|---------------|-----|-----|-----|-----|-----|------------|-------|
| 6.5 | 304 Stn. Stl. | 125 | 8.6 | -75 | 200 | No | 17057-01-W | \$160 |
| 30 | Nickel | 125 | 8.6 | -75 | 200 | Yes | 17057-03-W | \$160 |
| 100 | Copper | 125 | 8.6 | -75 | 200 | No | 17057-05-W | \$160 |


For welding instructions see page L23. For lead attachment see page K19. For thread connection see page L27.

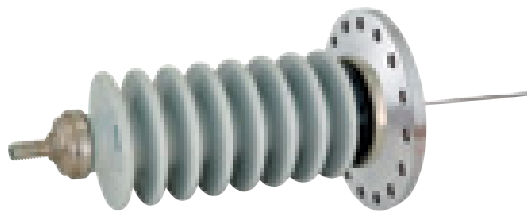

DC Voltage: 90 KV

One Conductor

Installation: 6" ConFlat (NW100CF)

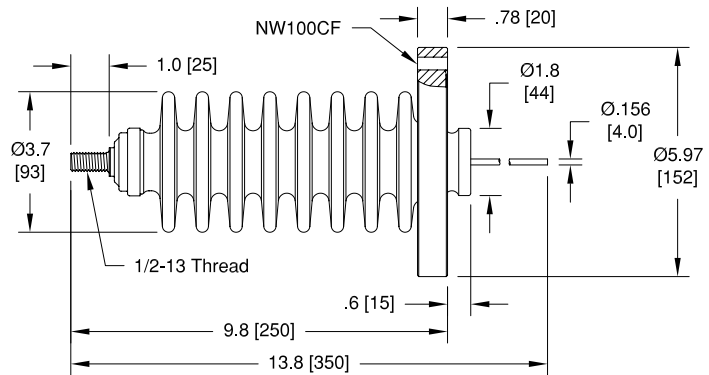

| Amps | Conductor Material | Pressure @ 20°C | | Temperature °C | | Magnetic Materials | Ceramaseal Part Number | List Price |
|------|--------------------|-----------------|-----|----------------|-----|--------------------|------------------------|------------|
| | | PSIG | Bar | Min | Max | | | |

| | | | | | | | | |
|-----|---------------|-----|-----|-----|-----|-----|-------------|-------|
| 6.5 | 304 Stn. Stl. | 125 | 8.6 | -75 | 200 | No | 17057-02-CF | \$335 |
| 30 | Nickel | 125 | 8.6 | -75 | 200 | Yes | 17057-04-CF | \$335 |
| 100 | Copper | 125 | 8.6 | -75 | 200 | No | 17057-06-CF | \$335 |

For flange assembly instructions see pages L24 - L25. For lead attachment see page K19. For thread connection see page L27.